Reolink

Reolink Solar Panel 2S

First Continuous Solar Power Supply in All Weathers


- Unremitting Power with Built-In Battery
- Charging at Low Temperature
- Simple & Flexible Installation
- IP67 Weatherproof Rating

Specifications

Mechanical	
Dimensions	210 x 165 x 41 (mm)
Cable Length	4 meters
Weight (Panel Only)	760g
Power Port	USB Type-C port
Electrical Parameters (Solar Panel)	
Max. Voltage	6.0V
Max. Current	0.96A
Max. Power	6W
Electrical Parameters (Battery)	
Max. Voltage	5V
Max. Current	3A
Max. Power	15W
Nominal Voltage	7.2V
Battery Capacity	5900mAh
Energy	42.48Wh

Working Environment	
Operating Temperature	-20℃ ~ 58℃ (-4℉ ~ 136.4℉)
Recharging Temperature	-10℃ ~ +50℃ (14°F ~ 122°F)
Operating Humidity	0%~100%
Weatherproof	IP67

Gallery & Specs

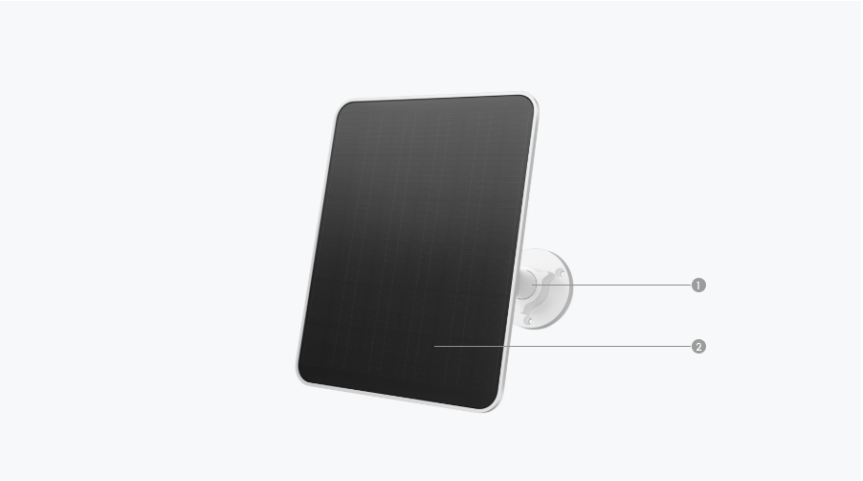

1. Mounting Bracket
2. Solar Panel